


**1½, 2 and 2½ Inch Pressure Gauges.
Glycerine Filled for Accuracy.**

- **Stainless Steel Case & Bezel**
- **Brass & Phosphor Bronze Bourdon Tube**
- **Vacuum to 6,000 PSI Range**
- **Dual Scale PSI & BAR**
- **Accuracy ± 1.6% FSD**
- **Temperature Range -40° to 180° F**
- **Brass Connection**



INSTALLATION DATA

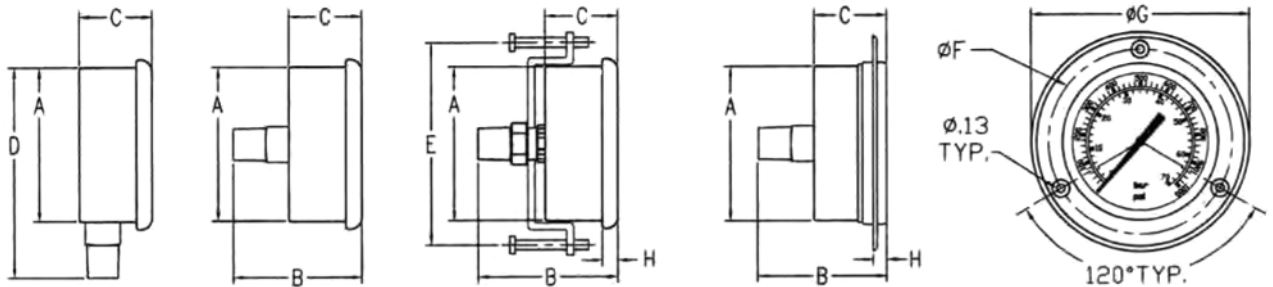

Size	A	B	C	D	E	F	G	H
1 1/2 inch	1.61	1.75	1.00	-	-	-	-	.20
2 inch	2.00	2.25	1.16	3.09	2.36	2.51	2.87	.21
2 1/2 inch	2.44	2.25	1.14	3.42	3.17	2.93	3.43	.24

Ordering Example: AFS - CF - 1 P - 004 - A

- | | | | | |
|--|--|---|---|--|
| Model
CF
Designation
for glycerine
filled gages | Size
1 - 2 ½ dia.
5 - 2 dia.
*4 - 1 ½ dia. | Type
C - compound
V - vacuum
P - pressure | Range
002 - 30" Hg -30psi
000 - 30" Hg - 0psi
001 - 15 psi
002 - 30 psi
004 - 60 psi
007 - 100 psi
010 - 160 psi
015 - 200 psi
020 - 300 psi
040 - 600 psi | Style
A - stem
B - panel clamp
D - ctr. back
E - panel flange |
|--|--|---|---|--|

*Note: 1½ inch available only as a center back mount port size - 1/8 npt. Limited to 5000 PSI.
Port Sizes for 2" and 2 1/2" are 1/4 npt
Special sizes subject to minimum order qty.